

PORTOS TR7 spółka z ograniczoną odpowiedzialnością spółka komandytowa ul. Złota 71 62 - 800 Kalisz tel. 62 / 768 40 00 sekretariat@portosrolety.pl www.portosrolety.pl


User's manual of an **A-OK** motor



1. Connection scheme:

- Connection scheme of the radio controlled motor and a switch

L =	Phase	1 =	N Neutral/ blue
N =	Neutral	2 =	Top/ black
⊕ =	Protective conductor	3 =	Bottom/ brown
		⊕ =	Protective conductor / yellow and green

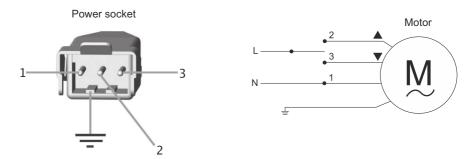


If the motor directions are reversed, the location of the black and brown wires shall be respectively changed.

2. Configuring the end-limit switch positions:

Note! Configuration shall always start with the bottom end-limit switch position!

- 1. Set the motor in the position to be configured as the bottom end-limit switch position.
- 2. On the somfy remote control, press and hold for about 7 seconds the WT button the UP/DOWN motor movement will confirm successful performance of the operation.
- 3. Open the roller shutter up to the position to be configured as the upper end-limit switch position.
- 4. On the somfy remote control, press and hold for about 7 seconds the WT button the UP/DOWN motor movement will confirm successful performance of the operation.



3. Resetting the end-limit switch positions and the motor:

- 1. On the somfy remote control, simultaneously press the WT and DOWN buttons.
- 2. Release the WT button, pressing and holding the DOWN button.
- 3. After one 1 second, press and hold the WT button again and press and hold for about 3 seconds both buttons the double UP/DOWN motor movement will confirm successful performance of the operation.



1 second 3 seconds



WARNING - FOR THE SAFETY OF PEOPLE, IT IS IMPORTANT TO FOLLOW THESE USER'S INTRUCTIONS. KEEP THESE USER'S MANUAL AT ALL TIMES.



PORTOS TR7

spółka z ograniczoną odpowiedzialnością s. k. ul. Złota 71 62-800 Kalisz tel 62 768 40 11

E-mail: sekretariat@portosrolety.pl

www.portosrolety.pl